


BR2723



Connector housing with single locking latch
Caja de enchufe con sujeción simple

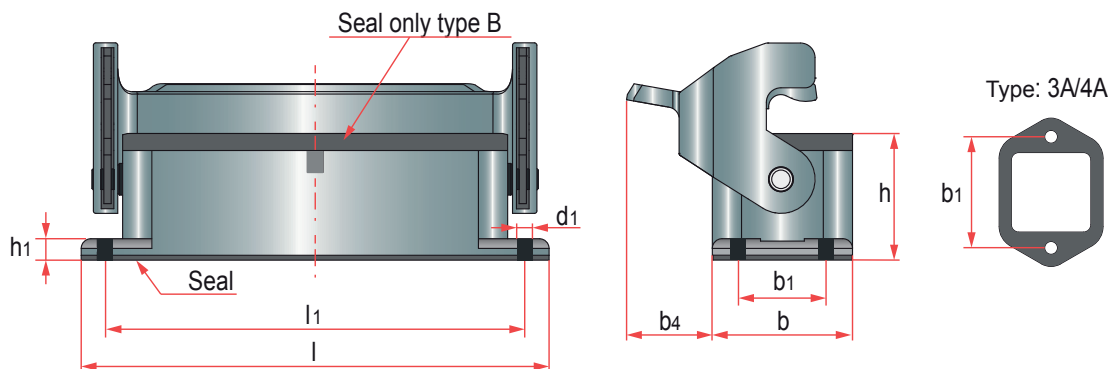

Mat. Powder coated die-cast aluminium. Maximum temperature at work: 125° C.

l	b	h	l1	b1	h1	d1	l3	b3	b4	d5	polos	tipo	DESCRIPCION
28	40	23	-	30	3	3,2	22	22	17	M3	3	A	BR2723/03A
			-								4		BR2723/04A
81	29	26	70	17,5	4,5	3,4	57	24	22		10		BR2723/10A
96			86								16		BR2723/16A
93	43	29	83	32	5	4,4	60	35	23	M4	10	B	BR2723/10B
113			103								16		BR2723/16B
140			130								24		BR2723/24B

Type of connector BR2711, 2712

