



BR601



Quick-release coupling
 Enchufe rápido
 Szybkozłącze bez zaworu
 Acoplador rapido
 Coupleur rapide

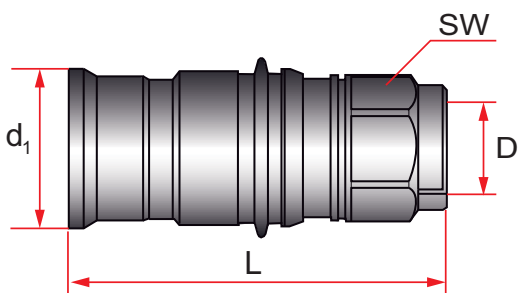

D	d ₁	L	SW	whit valve/con valvula	
				REF.	
G 3/4"	53	119,5	42	BR601.20 DGB 26	
G 1"	60	140	50	BR601.25 DGB 33	
G 1"-1/4	60	140	50	BR601.25 DGB 42	
G 1"-1/2	82	158	70	BR601.38 DGB 48	
G 2"	82	158	70	BR601.38 DGB 60	

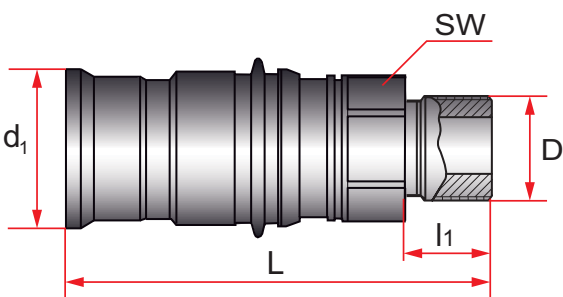

D	d ₁	L	l ₁	SW	whit valve/con valvula	
					REF.	
G 1"	53	132	20	42	BR601.20 EGB 33	
G 1"	60	144	20	50	BR601.25 EGB 33	
G 1"-1/4	60	144	21	50	BR601.25 EGB 42	
G 1"-1/2	82	167	24	70	BR601.38 EGB 48	

BSP Threads - Cylindrical = "G" Conical = "R"

Roscas BSP - Cilindrica = "G" Cónica = "R"

Mat: Brass
 Mat: Latón

O-ring: Viton®
 Junta: Vitón®

Temperature range: -20°C +100°C
 Rango de temperatura: -20°C + 100°C

Working pressure: 16 bar
 Presión de trabajo : 16 bar