



BR601




Quick-release coupling male
 Racor de enchufe rápido macho
 Końcówka szybkozłącza
 Racord rapido
 Racord mâle rapide



d	l	SW	without valve /sin valvula
			REF.
G 1/4"	34	17	BR601.06 DR 13
G 3/8"	37	22	BR601.09 DR 17
G 1/2"	45	27	BR601.12 DR 21
G 3/4"	58	32	BR601.16 DR 26

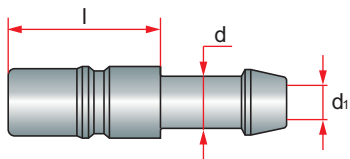

d	d ₁	l	without valve /sin valvula
			REF.
8	8	24,5	BR601.06 HR 08
12	12	53	BR601.09 HR 12
16	16	30	BR601.12 HR 16
20	19	37	BR601.16 HR 19

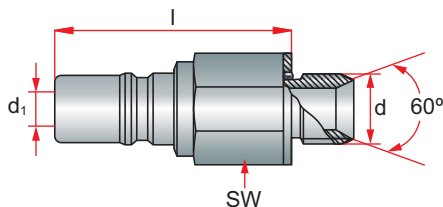

d	d ₁	l	SW	without valve /sin valvula
				REF.
G 1/8	10	38	17	BR601.06 ORB 10
G 1/4	13	36	17	BR601.06 ORB 13
G 1/4	13	38	19	BR601.06 ORB 13
G 3/8	17	38	20	BR601.06 ORB 17
G 3/8	17	53,5	24	BR601.06 ORB 17
G 1/2	21	50	24	BR601.06 ORB 21
G 3/4	26	67	32	BR601.06 ORB 26

BSP Threads - Cylindrical = "G" Conical = "R"

Roscas BSP - Cilíndrica = "G" Cónica = "R"

Mat: Brass **Temperature range: -20°C +100° C**

Mat: Latón Rango de temperatura: -20°C + 100° C

Working pressure: 16 bar

Presión de trabajo : 16 bar