




BR601





Quick-release coupling male
 Racor de enchufe rápido macho
 Końcówka szybkozłącza
 Racord rapido
 Racord mâle rapide

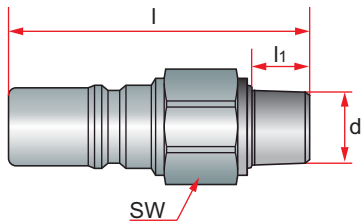


d	l	l ₁	SW	with valve /con valvula	
				REF.	
R 1/8"	45	7	17	BR601.06 RRB 10	
R 1/4"	45	9	17	BR601.06 RRB 13	
R 1/4"	51	9	19	BR601.09 RRB 13	
R 3/8"	48	10	20	BR601.09 RRB 17	
R 3/8"	63,5	10	24	BR601.12 RRB 17	
R 1/2"	62	12	24	BR601.12 RRB 21	
R 3/4"	81	14	32	BR601.16 RRB 26	



d	l	l ₁	SW	with valve /con valvula	
				REF.	
G 3/8"	26	10	19	BR601.06 ERB 17	
G 1/2"	25	12	22	BR601.09 ERB 21	
G 3/4"	30	16	27	BR601.12 ERB 26	
G 1"	38	24	32	BR601.16 RRB 33	



d	l	SW	with valve /con valvula	
			REF.	
G 1/4"	47	17	BR601.06 DRB 13	
G 1/4"	48,5	19	BR601.09 DRB 13	
G 3/8"	49	22	BR601.09 DRB 17	
G 3/4"	81	32	BR601.16 DRB 26	

BSP Threads - Cylindrical = "G" Conical = "R"

Roscas BSP - Cilíndrica = "G" Cónica = "R"

Mat: Brass
 Mat: Latón

O-ring: Viton®
 Junta: Vitón®

Temperature range: -20°C +100°C
 Rango de temperatura: -20°C + 100°C

Working pressure: 16 bar
 Presión de trabajo : 16 bar